


DEPLOY.
ANTI-TORQUE SWIVEL 2-7/8"
 CIRCULATING HEAD & SCREEN SUB



with ADJUSTABLE REACTIVE TORQUE BACKUP

The 2-7/8 Anti-Torque Swivel allows 2-7/8 motors to be used on service rigs without power swivels. It is hydraulically activated to prevent rotation of the drill string which allows rotation in both directions while pumps are disengaged.

Maximum Operating Pressure: 3000 psi
Maximum Pressure: 3500 psi
Load Testing Available: 125000 lbs (62.5 US ton)

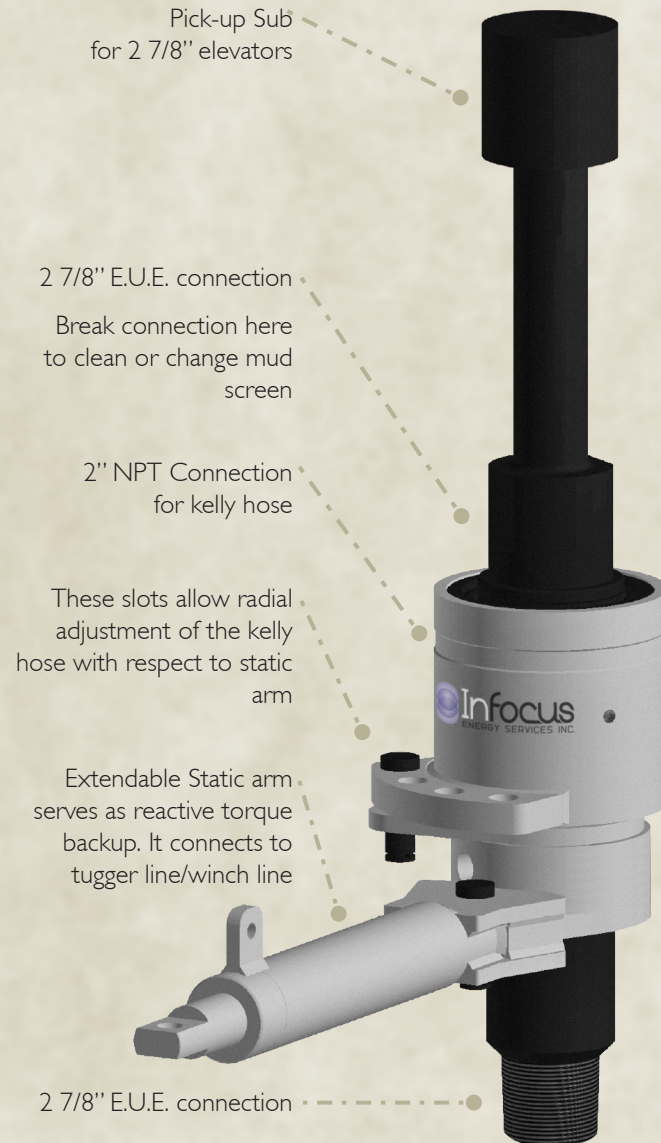

Check back to our website periodically, and follow us on social media.

